
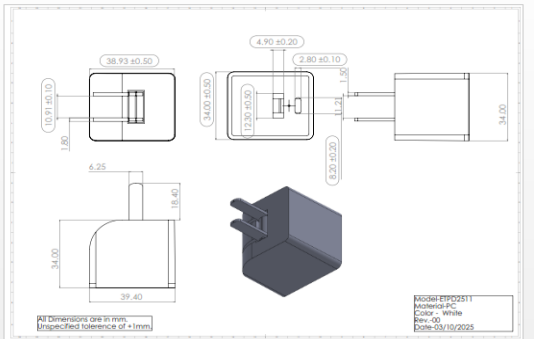
		BMT INDIA TECHNOLOGIES		
		PRODUCT SPECIFICATION		
PRODUCT CATEGORY:- WALL CHARGER DUAL PORT PD3.0 AND QC3.0		DATE:-10/01/2025		
PRODUCT SUB-CATEGORY :- POWER ADAPTOR FOR IT EQUIPMENTS		REVISION :- 00		
MODEL NAME:- BMTPDQ-2511-AC				
USB TYPE: C-TYPE & USB-A				
DRIVER OUTPUT TYPE:- CONSTANT VOLTAGE/CONSTANT CURRENT/ISOLATED				
	FEATURES :			
	The Faster, the Better: This dual port wall charger equipped with PD3.0 port and QC3.0 port provide max output 20w fast charging , designed to take your Phone from 0 to 50% in just 30 minutes . Support 3x times faster then normal charger by Combine the power of Power Delivery and Fast charging with a 20W output- and you get the perfect charging station. The wall charger is best suited for Type C to Type C and Type C to Lightning Cables and USB-A to C type and USB-A to micro . (Cables not included)			
	Safe & Reliable : The USB-C port PD3.0/QC3.0 charger detects the connected device to deliver the right amount of power to charge that device as fast as possible. This ensures fast charging without delivering too much power which could damage circuitry adapter			
	Goes with Everything: Compatibility that goes a long way- the PD3.0/QC3.0 Dual port Wall charger is compatible with all iOS devices mobiles, and especially the iPhone 12! Additional compatible devices include iPhone 11 / 11 Pro / 11 pro Max /iPhone 12mini/12/12 pro/ XS / XS Max / XR / X, and all other versions till date. It also fully supports the iPad Pro 10.5" / iPad Air3 10.5"/ iPad mini 5 7.9" and later models!			
	To achieve fast charging: In addition to using this fast charger, your charging cables and mobile phones also need to support fast charging protocol			
	Safe Fast Charging: With the intelligent chip inside, the PD3.0/QC3.0 Dual Port charger matches the current your device needs automatically. Over-current, over-voltage, and short-circuit protection effectively protect your devices from damage and ensure safer charging overnight.thanks to the smart recognition system.			
	Material: This product is built in adapting anti fire PC material FR grade.			
	Product Compatibility with Protocols:	CTYPE	PD3.0/PPS/Apple 2.4/BC1.2	
		USB-A	QC2.0/QC3.0/DCP1.5/APPLE2.4A/AFC/SCP/FCP	
	Products comes with 24 month warranty.			
INPUT	AC VOLTAGE INPUT RANGE		100 - 300Vac	
	AC VOLTAGE RATED		220 - 240Vac	
	AC CURRENT		0.65A@90Vac	
	RATED POWER (Pin)Max		25W	
	INRUSH CURRENT (Typ)		COLD START 25A@230Vac	
	LEAKAGE CURRENT		< 2mA@230Vac	
	EFFICIENCY (Typ) AT CABLE END		≥ 75%	≥ 80%
	FREQUENCY RANGE		47 - 63 Hz	
OUTPUT	PD3.0/QC3.0 20W C-PORT			
	DC NO LOAD VOLTAGE	STEP-1	STEP-2	STEP-3
		5V-5.5V	9V- 9.2V	12V- 12.2V
	DC ON LOAD VOLTAGE RANGE	4.4V-5.2V	8.5V- 9.1V	11.6V- 12.1V
	DC CURRENT RANGE	0-3A	0- 2.22A	0- 1.67A
	DC POWER (Pout) MAX	16W	20W	20W
	EFFICIENCY	≥85%	≥88%	≥88%
	Measured on the board			
	RIPPLE & NOISE (max)Vp-p	<150mV	≤180mV	≤250mV
	LINE REGULATION	±2%		
	LOAD REGULATION	±2%		
	SETUP STARTUP TIME	< 2S@230Vac		
	LEAD CABLE COMPENSATION	<3% OF DC NO LOAD VOLTAGE		
	QC3.0 20W USB-A PORT			
	DC NO LOAD VOLTAGE	STEP-1	STEP-2	STEP-3
		5V-5.5V	9V- 9.2V	12V- 12.2V
	DC ON LOAD VOLTAGE RANGE	4.4V-5.2V	8.5V- 9.1V	11.6V- 12.1V
	DC CURRENT RANGE	0-3A	0- 2.22A	0- 1.67A
	DC POWER (Pout) MAX	16W	20W	20W
	EFFICIENCY	≥85%	≥88%	≥88%
	Measured on the board			
	RIPPLE & NOISE (max)Vp-p	<150mV	≤180mV	≤250mV
	LINE REGULATION	±2%		
	LOAD REGULATION	±2%		
	SETUP STARTUP TIME	< 2S@230Vac		
	LEAD CABLE COMPENSATION	<2% OF DC NO LOAD VOLTAGE		

		DUAL PORT AT SAME TIME		
OUTPUT	DC NO LOAD VOLTAGE	USB-A PORT	C-TYPE PORT	
		5V-5.5V	5V-5.5V	
	DC ON LOAD VOLTAGE RANGE	4.4V-5.2V	4.4V-5.2V	
	DC CURRENT RANGE	0-1.5A	0-1.5A	
	DC POWER (Pout) MAX	8W	8W	
	EFFICIENCY	≥80%	≥80%	
	Measured on the board			
	RIPPLE & NOISE (max)Vp-p	<150mV	<150mV	
	SETUP STARTUP TIME	< 2S@230Vac		
	LINE REGULATION	±2%		
PROTECTION	LOAD REGULATION	±2%		
	LEAD CABLE COMPENSATION	<3% OF DC NO LOAD VOLTAGE		
	OVER VOLTAGE	YES		
	OVER CURRENT	YES, 110%-150%OF RATED CURRENT		
	DC SHORT CIRCUIT	YES WITH AUTO RESTART FUNCTION		
SAFETY	OVER CHARGING	SMART PROTECTION		
	OVER TEMPERATURE	Hiccup Mode, Recovers automatically after faults removed		
	SAFETY STANDARD	IEC-60950-1-2005/IS-13252(PART-1):2010		
	WITH STAND VOLTAGE	I/P-O/P:3KVAC, I/P-FG:1.5KVAC, O/P-FG:1.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG,O/P-FG:100Mohm/500VDC		
	PRODUCTION ISOLATION	CLASS-II		
	IP	20		
	EMC EMISSION	CONDUCTED	FCC15/CISPR22/CISPR32	CLASS B
		REDIATED	FCC15/CISPR22/CISPR32	CLASS B
		HARMONIC CURRENT	IEC-61000-3-2	CLASS A
EMC IMMUNITY	SURGE SUSCEPTIBILITY	IEC-61000-4-5	LEVEL 3 3KV/L-N	
	ESD	IEC-61000-4-2	LEVEL3 8KV AIR, LEVEL 2 4KV CONTACT	
	VOLTAGE DIPS,SHORTS INTERRUPTIONS	IEC-61000-4-11	TEST LEVELS	
			VOLTAGE DIP >95%	
			VOLTAGE DIP >30%	
			SHORT INTERRUPTION >95%	
ENVIRONMENT	WORKING TEMP	0 to +40°C		
	CASE TEMP	≤70°C		
	WORKING HUMIDITY	10~95% RH		
PRODUCT SPECIFICATION	TYPE OF USB	C-TYPE AND USB-A TYPE		
	NO OF USB PORT	2		
	LED INDICATOR	NO		
MECHANICAL	IP PROTECTION	IP20		
	HOUSING MATERIAL	PC FR-GARDE		
	HOSUING COLOR	BLACK		
	AC PIN TYPE	US TYPE		
	HOUSING DIMENSION	(LXBXH)(37X33.5X31.5)mm±1mm		
NOTE	PRODUCT WEIGHT	50gm ±5gm		
	1. ALL PARAMETERS MENTIONED ARE MEASURED AT 230vac INPUT, RATED LOAD AND 25° AMBINET TEMPERATURE. 2. RIPPLE AND NOISE ARE MEASURED AT 20MHz OF BANDWIDTH WITH 0.1uF & 10uF PARALLEL CAP 3. CABLE SHOULD BE USED OF 4A TO AVOID VOLTAGE DROP AND SLOW CHARGING			
<div><div>Model: PPD0511 Material: PC Color : White Rev: 00 Date: 03/10/2023</div><div>All Dimensions are in mm (Unspecified tolerance of ±1mm)</div></div>				